


SPRING MOUNTS - 25mm DEFLECTION



DIMENSIONS & SELECTION TABLES

Open Spring Mounts

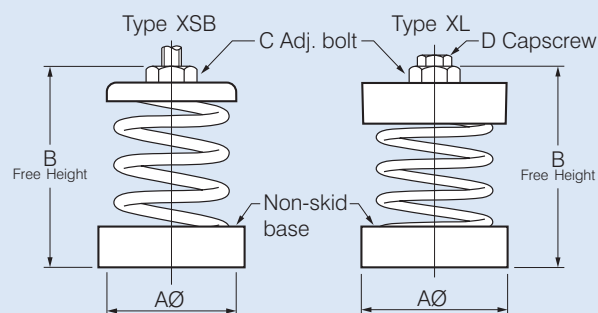

FEATURES

A low cost easily-installed, all-purpose spring mount in which the spring can be quickly interchanged to give a wide range of load-deflection characteristics, provides effective isolation of noise and vibration.

We have only featured the spring mounts most commonly used with the equipment shown in this catalogue.

Types XSB and XL only

- Heavy-duty steel spring.
- Colour-coded for easy identification of the load range.
- Built-in levelling bolt with locking capscrew, capable of compensating for full static deflection.
- Separate top and bottom location cups.
- Rubber-isolated bolt hole in base.
- Moulded noise-absorbing rubber base cup with non-skid surface.

Type SHS only

- Heavy-duty steel spring.
- Colour-coded for easy identification of the load range.
- Heavy-duty steel cage.
- Large diameter lower isolated rod clearance hole in the cage.
- Fully weatherproofed.


If features or ratings are required beyond that shown, please contact Fantech.

HOW TO ORDER

When selecting vibration isolators, divide the weight of the unit being isolated by the number of mounts being used to determine the kg/mount required. Then select the mount with the next highest weight loading and deflection required. Vibration isolators are generally used in sets of four.

Model Number	Colour	Max. Load kg/mt	Static Defl. mm	Dimensions, mm			
				AØ	B	C	D
XSB-9	Yellow	10	33				
XSB-10	Brown	15	33				
XSB-11	Blue	30	33				
XSB-12	Black	50	28	55	106	M12	-
XSB-13	Red	75	25				
XSB-14	Green	125	25				
XSB-16	Grey	175	20				
XSB-17	Orange	200	15				
XL-92	Yellow	50	33				
XL-93	Brown	100	33	80	127	M16	M10
XL-94	Blue	150	30				
XL-95	Black	200	30				
XL-96	Red	250	28				
XL-97	Green	300	28	80	132	M16	M10
XL-98	Grey	400	25				

Hanger Mounts

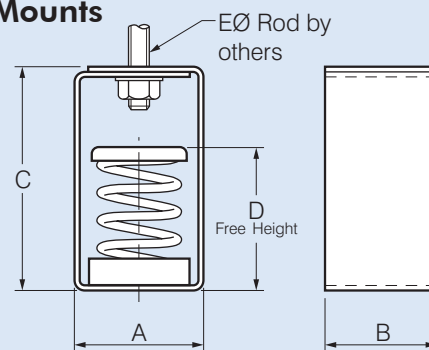

Model Number	Colour	Max. Load kg/mt	Static Defl. mm	Dimensions, mm				
				A	B	C	D	EØ
SHS-9	Yellow	10	33					
SHS-10	Brown	15	33					
SHS-11	Blue	30	33					
SHS-12	Black	50	28	75	65	130	86	12
SHS-13	Red	75	25					
SHS-14	Green	125	25					
SHS-16	Grey	175	20					
SHS-17	Orange	200	15					